


Angles, Equal Legs

Architectural

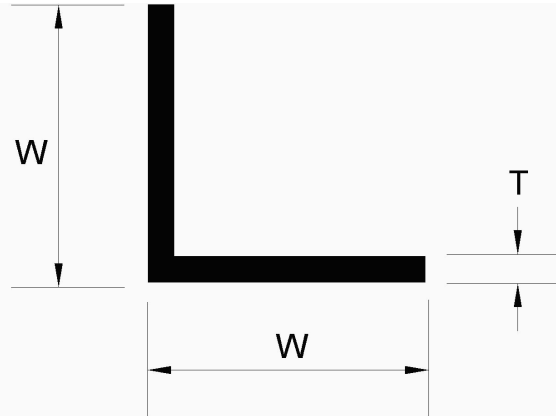

| Die Number | Dim (W) | Dim (T) | WT. (LBS/FT) | WT. (KGS/MT) | Toronto | Ohio |
|------------|---------|---------|--------------|--------------|---------|------|
| S-3838 | 0.500 | 0.125 | 0.129 | 0.192 | ✓ | |
| S-3488 | 0.750 | 0.062 | 0.105 | 0.156 | ✓ | |
| S-2240 | 0.750 | 0.125 | 0.203 | 0.302 | ✓ | ✓ |
| S-6095 | 0.906 | 0.177 | 0.342 | 0.508 | ✓ | |
| S-3804 | 1.000 | 0.062 | 0.142 | 0.211 | ✓ | ✓ |
| S-4464 | 1.000 | 0.100 | 0.224 | 0.333 | ✓ | |
| S-2238 | 1.000 | 0.125 | 0.277 | 0.412 | ✓ | ✓ |
| S-3316 | 1.000 | 0.187 | 0.400 | 0.595 | ✓ | |
| S-4473 | 1.240 | 0.240 | 0.635 | 0.945 | ✓ | |
| S-22341 | 1.250 | 0.094 | 0.267 | 0.397 | | ✓ |
| S-2416 | 1.250 | 0.125 | 0.350 | 0.521 | ✓ | ✓ |
| S-15797 | 1.250 | 0.187 | 0.510 | 0.759 | ✓ | ✓ |
| S-10940 | 1.500 | 0.062 | 0.215 | 0.319 | ✓ | |
| S-2241 | 1.500 | 0.125 | 0.424 | 0.631 | ✓ | ✓ |
| S-2103 | 1.500 | 0.187 | 0.621 | 0.924 | ✓ | ✓ |
| S-13142 | 1.500 | 0.250 | 0.811 | 1.207 | | ✓ |
| S-15988 | 1.500 | 0.250 | 0.811 | 1.207 | ✓ | |
| S-2360 | 1.750 | 0.125 | 0.498 | 0.741 | ✓ | |
| S-2109 | 1.750 | 0.187 | 0.731 | 1.087 | ✓ | ✓ |
| S-3821 | 1.750 | 0.250 | 0.959 | 1.427 | ✓ | |
| S-13040 | 2.000 | 0.110 | 0.505 | 0.751 | | ✓ |
| S-5129 | 2.000 | 0.125 | 0.571 | 0.850 | ✓ | ✓ |
| S-2199 | 2.000 | 0.187 | 0.841 | 1.251 | ✓ | ✓ |
| S-2456 | 2.000 | 0.250 | 1.106 | 1.646 | ✓ | ✓ |
| S-3051 | 2.500 | 0.125 | 0.719 | 1.070 | ✓ | ✓ |
| S-3615 | 2.500 | 0.187 | 1.062 | 1.580 | ✓ | ✓ |
| S-15150 | 2.500 | 0.250 | 1.401 | 2.085 | ✓ | ✓ |
| S-21456 | 3.000 | 0.125 | 0.866 | 1.289 | ✓ | |
| S-15151 | 3.000 | 0.250 | 1.696 | 2.524 | ✓ | ✓ |
| S-2418 | 3.000 | 0.375 | 2.489 | 3.704 | ✓ | |
| S-2123 | 3.000 | 0.500 | 3.245 | 4.829 | ✓ | ✓ |