



Channels

Architectual

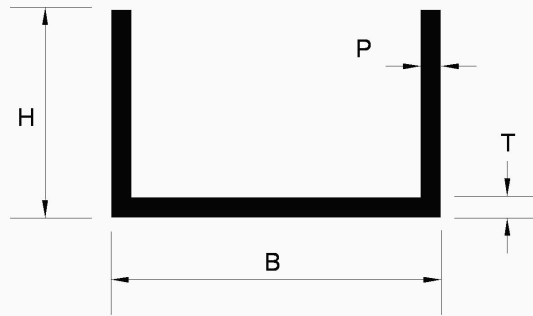

| Die Number | Dim. (B) | Dim. (H) | Dim. (P) | Dim. (T) | WT. (LBS/FT) | WT. (KGS/MT) | Toronto | Ohio |
|------------|----------|----------|----------|----------|--------------|--------------|---------|------|
| S-3204 | 0.500 | 0.500 | 0.062 | 0.062 | 0.101 | 0.150 | ✓ | |
| S-3206 | 0.500 | 0.625 | 0.062 | 0.062 | 0.119 | 0.177 | ✓ | |
| S-3400 | 0.500 | 0.750 | 0.125 | 0.125 | 0.258 | 0.384 | ✓ | ✓ |
| S-2141 | 0.625 | 0.625 | 0.062 | 0.062 | 0.129 | 0.191 | ✓ | |
| S-2207 | 0.625 | 0.750 | 0.062 | 0.062 | 0.146 | 0.217 | ✓ | |
| S-5792 | 0.625 | 1.250 | 0.062 | 0.062 | 0.219 | 0.327 | ✓ | |
| S-26694 | 0.730 | 1.110 | 0.110 | 0.110 | 0.354 | 0.527 | | ✓ |
| S-2255 | 0.750 | 0.500 | 0.125 | 0.125 | 0.222 | 0.330 | ✓ | |
| S-7242 | 0.750 | 0.750 | 0.062 | 0.062 | 0.156 | 0.232 | ✓ | |
| S-7577 | 0.750 | 0.750 | 0.125 | 0.125 | 0.295 | 0.439 | ✓ | ✓ |
| S-26695 | 0.750 | 1.375 | 0.125 | 0.125 | 0.479 | 0.713 | | ✓ |
| S-2121 | 0.875 | 0.875 | 0.050 | 0.050 | 0.149 | 0.222 | ✓ | |
| S-2138 | 1.000 | 0.500 | 0.125 | 0.125 | 0.258 | 0.384 | ✓ | ✓ |
| S-22112 | 1.000 | 0.750 | 0.065 | 0.065 | 0.182 | 0.270 | ✓ | |
| S-9081 | 1.000 | 0.750 | 0.125 | 0.125 | 0.332 | 0.493 | ✓ | |
| S-7243 | 1.000 | 1.000 | 0.125 | 0.125 | 0.406 | 0.604 | ✓ | ✓ |
| S-16346 | 1.000 | 2.000 | 0.125 | 0.125 | 0.700 | 1.042 | | ✓ |
| S-19866 | 1.250 | 0.500 | 0.125 | 0.125 | 0.295 | 0.439 | | ✓ |
| S-3326 | 1.250 | 0.625 | 0.125 | 0.125 | 0.332 | 0.494 | ✓ | |
| S-26696 | 1.250 | 0.687 | 0.250 | 0.250 | 0.626 | 0.932 | | ✓ |
| S-26697 | 1.250 | 0.781 | 0.250 | 0.375 | 0.682 | 1.015 | | ✓ |
| S-4647 | 1.260 | 1.145 | 0.125 | 0.125 | 0.486 | 0.723 | ✓ | |
| S-20926 | 1.360 | 1.000 | 0.048 | 0.048 | 0.191 | 0.284 | | ✓ |
| S-7809 | 1.450 | 1.000 | 0.125 | 0.125 | 0.472 | 0.702 | ✓ | |
| S-6855 | 1.500 | 0.500 | 0.125 | 0.125 | 0.332 | 0.493 | ✓ | ✓ |
| S-2703 | 1.500 | 0.625 | 0.093 | 0.093 | 0.281 | 0.418 | ✓ | |
| S-8943 | 1.500 | 0.750 | 0.063 | 0.063 | 0.212 | 0.316 | ✓ | |
| S-25206 | 1.500 | 0.750 | 0.125 | 0.125 | 0.405 | 0.603 | ✓ | |
| S-7791 | 1.500 | 1.000 | 0.125 | 0.125 | 0.479 | 0.713 | ✓ | ✓ |
| S-7235 | 1.500 | 1.500 | 0.125 | 0.125 | 0.627 | 0.932 | ✓ | |
| S-21823 | 1.500 | 1.500 | 0.250 | 0.250 | 1.180 | 1.756 | | ✓ |
| S-22230 | 1.625 | 0.750 | 0.125 | 0.125 | 0.424 | 0.631 | | ✓ |

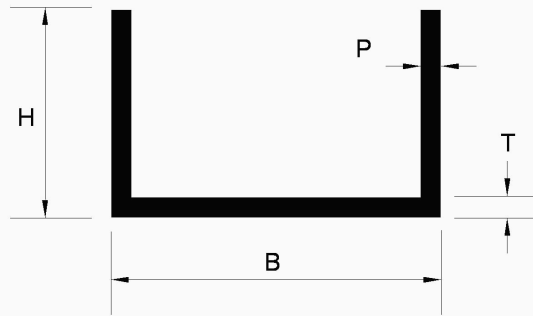

| Die Number | Dim. (B) | Dim. (H) | Dim. (P) | Dim. (T) | WT. (LBS/FT) | WT. (KGS/MT) | Toronto | Ohio |
|------------|----------|----------|----------|----------|--------------|--------------|---------|------|
| S-3521 | 1.688 | 1.330 | 0.080 | 0.080 | 0.395 | 0.588 | ✓ | |
| S-15193 | 1.750 | 1.625 | 0.125 | 0.125 | 0.700 | 1.042 | | ✓ |
| S-2122 | 1.875 | 0.875 | 0.050 | 0.050 | 0.208 | 0.309 | ✓ | |
| S-9530 | 2.000 | 1.000 | 0.062 | 0.062 | 0.283 | 0.421 | ✓ | |
| S-3356 | 2.000 | 1.000 | 0.125 | 0.125 | 0.553 | 0.823 | ✓ | ✓ |
| S-28963 | 2.000 | 1.000 | 0.188 | 0.188 | 0.804 | 1.196 | | ✓ |
| S-70 | 2.000 | 2.000 | 0.250 | 0.250 | 1.622 | 2.414 | | ✓ |
| S-21966 | 2.500 | 1.000 | 0.125 | 0.125 | 0.627 | 0.932 | | ✓ |
| S-2440 | 2.500 | 1.312 | 0.188 | 0.188 | 1.054 | 1.568 | ✓ | |
| S-4254 | 2.500 | 1.500 | 0.125 | 0.125 | 0.774 | 1.152 | ✓ | ✓ |
| S-16431 | 2.500 | 1.500 | 0.188 | 0.188 | 1.136 | 1.691 | | ✓ |
| S-26921 | 2.500 | 2.000 | 0.250 | 0.375 | 2.065 | 3.073 | | ✓ |
| S-27948 | 2.938 | 4.000 | 0.125 | 0.250 | 1.973 | 2.936 | | ✓ |
| S-27937 | 3.000 | 0.500 | 0.125 | 0.125 | 0.553 | 0.823 | | ✓ |
| S-2752 | 3.000 | 1.000 | 0.125 | 0.125 | 0.701 | 1.043 | ✓ | ✓ |
| S-3512 | 3.000 | 1.500 | 0.125 | 0.125 | 0.848 | 1.262 | ✓ | |
| S-9709 | 3.000 | 1.500 | 0.187 | 0.187 | 1.241 | 1.847 | ✓ | ✓ |
| S-4503 | 3.750 | 1.250 | 0.187 | 0.187 | 1.297 | 1.930 | ✓ | |
| S-26698 | 4.000 | 0.969 | 0.125 | 0.125 | 0.839 | 1.248 | | ✓ |
| S-3138 | 4.000 | 1.000 | 0.100 | 0.100 | 0.684 | 1.018 | ✓ | ✓ |
| S-26437 | 4.000 | 1.650 | 0.250 | 0.180 | 1.716 | 2.554 | | ✓ |
| S-4619 | 4.200 | 0.500 | 0.062 | 0.062 | 0.372 | 0.554 | ✓ | |
| S-3399 | 4.500 | 4.500 | 0.125 | 0.125 | 1.954 | 2.908 | ✓ | |
| S-22687 | 5.000 | 2.000 | 0.188 | 0.188 | 1.913 | 2.847 | | ✓ |
| S-20924 | 5.000 | 2.000 | 0.250 | 0.250 | 2.507 | 3.731 | | ✓ |
| S-22434 | 5.250 | 1.000 | 0.125 | 0.125 | 1.032 | 1.536 | | ✓ |
| S-10169 | 5.906 | 1.969 | 0.197 | 0.197 | 2.194 | 3.266 | ✓ | |
| S-26440 | 6.000 | 2.000 | 0.230 | 0.200 | 2.392 | 3.560 | | ✓ |